

BODY TYPE: FULL FRAMED EXTRUDED  
TANK TYPE: DRY SIDE

DOC. NO. : E018-1 DRAWING TEMPLATE  
REV. C 2017-02-05

**SPECIFICATION**

**CHASSIS:**  
-FORD F550 4x4 WITH AMBULANCE PACKAGE, SUPER CAB  
-19,500 LB GVWR; 7,500 LB FRONT / 13,500 LB REAR  
-DIESEL ENGINE, 6.7L POWER STROKE  
-AUTOMATIC TRANSMISSION

**PUMP:**  
-HALE DSD1250 MIDSHIP  
-1250 USGPM AT 150 PSI  
-TESTED TO NFPA BY INDEPENDENT 3rd PARTY

**PLUMBING:** STAINLESS STEEL SCHEDULE 10  
-2 x 6" SUCTION, (1)ROAD, (1)CURB  
-2 x 2 1/2" GATED SUCTION, (1)ROAD (1)CURB  
-3 x 2 1/2" DISCHARGE PORT, (1)ROAD (1)CURB (1)REAR  
-1 x 4" STORZ DISCHARGE (3" PLUMBING), (1)CURB  
-2 x 1 1/2" CROSS LAY'S  
-4" TANK TO PUMP, W/3" BFY VALVE  
-2" TANK FILL

**TANK:**  
-300 USG POLY




**BODY:**  
-MINI PUMPER ALUMINUM HIGH/HIGH  
-BODY UNDERCOATING - CORASHIELD

**EMERGENCY EQUIPMENT-ACCESSORIES:**

-LIGHT BAR 56" LED  
-SIREN  
-100W SPEAKER  
-2 x REAR BEACONS (2)RED  
-2 x REAR LOWER LIGHT RED  
-2 x FLOOD LIGHTS  
-1 x HAND HELD SPOT LIGHT IN CAB  
-2 x GRILLE LIGHTS RED  
-4 x INTERSECTION LIGHTS RED LED  
-6 x GROUND LIGHTS  
-6 x SCENE LIGHTS  
-(4) 6" x 8' SUCTION HOSE  
-1 x BARREL STRAINER

**MODEL:**

WHELEN JUSTICE  
WHELEN SMARTSIREN  
WHELEN SA315  
WHELEN L31HRFN LED  
WHELEN 600 LED  
DTI 010WX6 LED  
COLLINS  
WHELEN 600 LED  
WHELEN LIN3 & 600  
LUMA BAR H20 12"  
WHELEN M6ZC LED

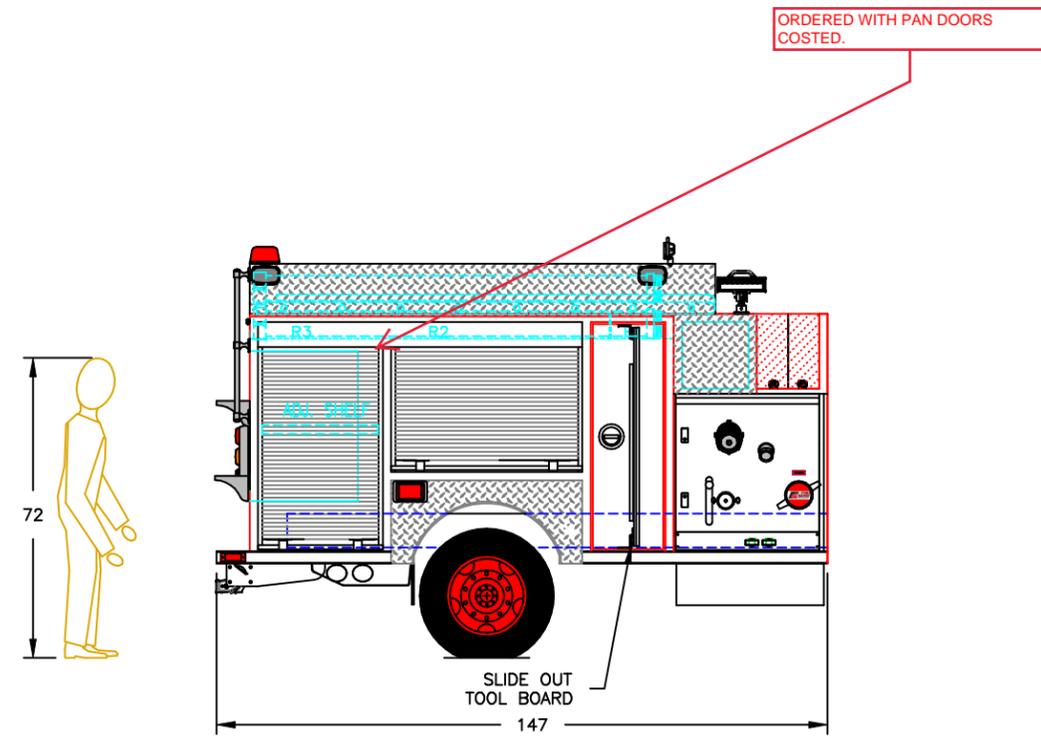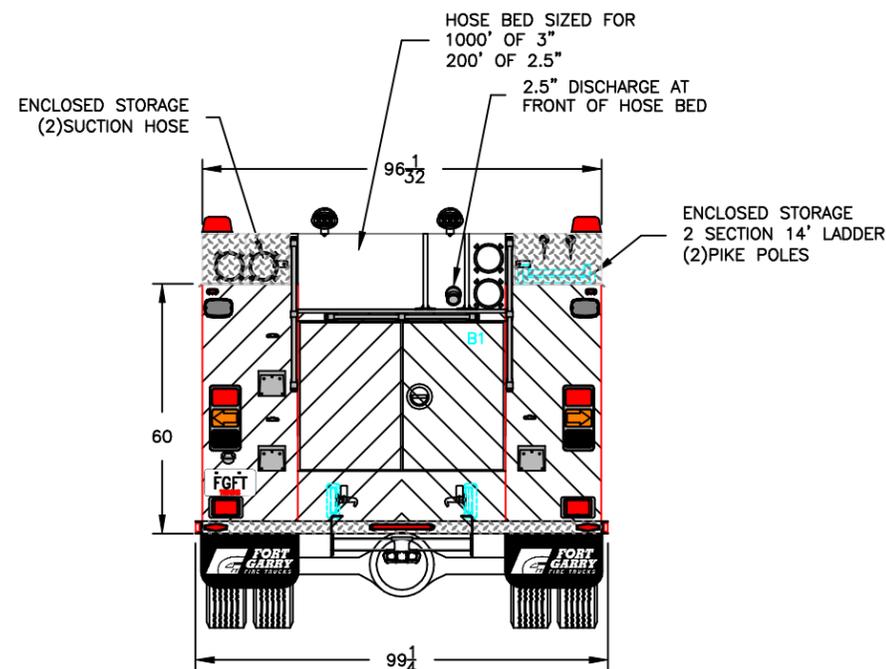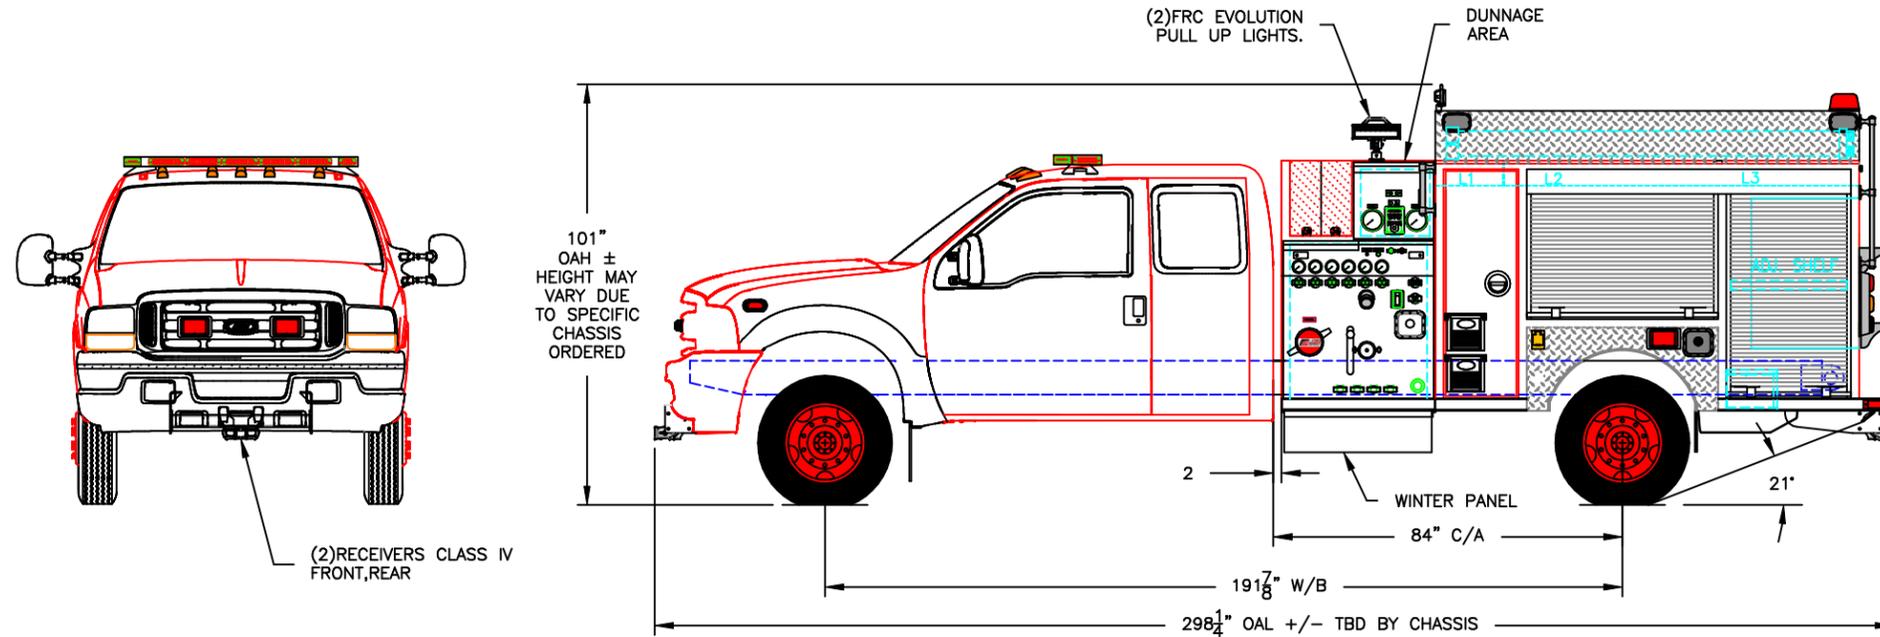

THIS DRAWING IS PROPERTY OF FORT GARRY FIRE TRUCKS LTD (FGFT) AND MUST NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, BY ANY METHOD WHATSOEVER, WITHOUT AUTHORIZATION OF FGFT.

COMPT.	COMPARTMENT FRAME DIMENSIONS
L1	18W x 55H x 23D
L2	46W x 36H x 23D
L3	30W x 55H x 23D
R1	18W x 55H x 23D
R2	46W x 36H x 23D
R3	30W x 55H x 23D
B1	50W x 36H x 26D

- NOTES:**
1. THE DRAWING IS FOR REFERENCE PURPOSE, ONLY. THE DRAWING MAY OR MAY NOT SHOW ALL ITEMS AS DESCRIBED IN THE WRITTEN DETAILED SPECIFICATION.
  2. INCLUSION OF AN ITEM ON THE DRAWING DOES NOT CONSTITUTE INCLUSION OF THAT ITEM WITH THE FINAL DELIVERY OF THE UNIT. SPECIFICATION SHALL BE FINAL AUTHORITY TO BE DETERMINED WHAT IS SUPPLIED ON THE APPARATUS.
  3. THE EFFECTIVE DOOR OPENING FOR ROLLUP DOORS WILL BE REDUCED APPROX. 10" IN HEIGHT, 2" IN DEPTH AND 2" IN WIDTH FROM SHOWN FRAME OPENINGS AND 2" IN HEIGHT, 3" IN DEPTH AND UP TO 4" IN WIDTH FOR PAN DOORS. DIMENSIONS TOLERANCE ± 1/4"
  4. PUMP RATING AND TANK CAPACITY ARE SHOWN AS NOMINAL VALUES. THE ACTUAL VALUES MAY VARY.
  5. CHASSIS GVWR SHOWN IS THE MINIMUM REQUIRED FOR STANDARD BODY DEPENDING OF OPTIONS, GVWR MAY NEED TO BE INCREASED.
  6. COMMERCIAL OEM CAB STEPS MAY NOT MEET ULC STANDARD. SELECT CUSTOM STEPS WHEN REQUIRED.
  7. OVERALL HEIGHT IS IN LOADED CONDITION, UNLOADED HEIGHT MAY BE 4" ABOVE HEIGHT SHOWN. AFTER TRUCK IS COMPLETED ADDITIONAL STEPS MAY BE REQUIRED TO MEET THE STANDARD.
  8. DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO CHANGE AS MAY BE FOUND NECESSARY DURING DESIGN. DO NOT SCALE DRAWING.
  9. MINOR DETAILS AND REFLECTIVE STRIPING ARE NOT SHOWN.

B	QUOTE DRAWING UPDATE	CI	15 NOV 2019
A	QUOTE DRAWING	CI	6 NOV 2019
REV	DESCRIPTION OF CHANGE	BY	DATE



WWW.FGFT.COM  
WINNIPEG, MANITOBA, CANADA 1-800-565-3473

DESCRIPTION: **WELLS FIRE DISTRICT #1**

SCALE: 1:45  
DWG. BY: CI  
CHK. BY:

MODEL: MP025D4

DATE: 6 NOV 2019

SHEET: 1 OF 1

DWG. NO. : 19PVM08