
CUSTOMER APPROVAL	IF NOT RETURNED TO FGFT BY THE DATE INDICATED BELOW, WE WILL PROCEED WITH FABRICATION AS PER THE DRAWING
SALES SIGNATURE:	
CUSTOMER SIGNATURE:	
DATE:	
RETURN TO FGFT BY:	DATE: NOVEMBER 27, 2021
REVIEWED BY:	
REVIEW DATE:	
ACCEPTED AS IS:	
MODEL TED TO TO.	
ACCEPTED WITH REVISION	NOTED:

BODY TYPE: EXTRUDED ALUMINUM TANK TYPE: DRY SIDE

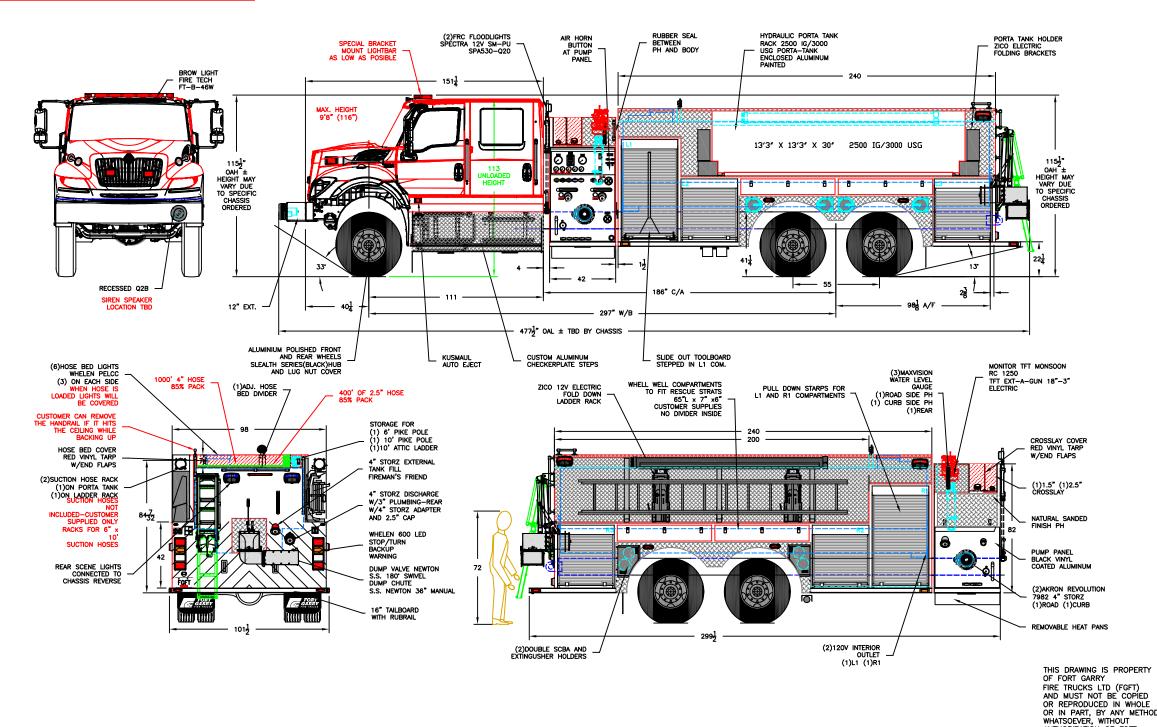

SPECIFICATION

CHASSIS:

DOC. NO.: E018-1 DRAWING TEMPLATE

REV. C 2017-02-05

- -INTERNATIONAL HV607 SBA 6X4 CREW CAB
- -64,000 LB GVWR; 18,000 LB FRONT / 46,000 LB REAR
- -DIESEL CUMMINS L9 450 EPA 2017, 450 HP
- -AUTOMATIC TRANSMISSION, ALLISON 3000 EVS -CHASSIS SUPPLIED ANTI ROLL STABILITY

PUMP:

-HALE MIDSHIP QMAX1750

-1750 USGPM (6624 LPM) (1457 IGPM) AT 150 PSI

-THIRD PARTY CERTIFICATION MEETING NFPA 1901-2016 EDITION

PLUMBING AND PIPING:

- PLUMBING AND PIPING:

 2 x 6" SUCTION, (1)ROAD (1)CURB

 3 x 2 1/2" DISCHARGE PORT, (2)ROAD (1)CURB

 2 x 2 1/2" AUX. SUCTION, (1)ROAD (1)CURB

 1 x 1 1/2" CROSSLAY, W/2" PLUMBING

 1 x 2 1/2" CROSSLAY, W/3" PLUMBING

 1 x 4" STORZ DISCHARGE W/4" PLUMBING, HANDWHEEL

 1 x 4" STORZ DISCH. W/3" PLUMBING (1)REAR

- 1 x 3" MONITOR STAND PIPE 1 x 4" EXTERNAL TANK FILL FIREMAN'S FRIEND, (1) REAR 2 x 4" TANK TO PUMP W/4" AKRON BALL VALVE ELECTRIC - 3" TANK FILL AKRON

TANK: -3000 USG (2500 IG) WATER TANK

BODY:

-DRY SIDE TANKER, EXTRUDED ALUMINUM LOW/LOW

-BODY UNDERCOATING CORASHIELD

-CHASSIS RUST INHIBITOR KROWN PROCESS

EMERGENCY EQUIPMENT/ACCESSORIES:

– LIGHT BAR 56" LED – SIREN SMART

- 1 x 100W SPEAKER - 1 x FLOOD LIGHTS

- 2 x GRILLE LIGHTS RED

2 x LOWER SIDE WARNING LIGHTS RED-CHASSIS
 4 x LOWER SIDE WARNING LIGHTS RED-FENDER

- 2 x REAR LWR WARNING LIGHTS RED-TAILLIGHTS

- 4 x SIDE UPPER WAR. LIGHTS SPLIT RED/WHITE - 2 x REAR UPP. WAR. LIGHTS BLUE/ WHITE

- 8 x GROUND LIGHTS

-AIR CHARGING PROVISION -BATTERY CHARGING PROVISION

-ANTENNA MOUNT

10' ATTIC LADDER14' ROOF LADDER

- 24' (2)SECTION EXTENSION LADDER

WHELEN JUSTICE WHELEN CEN COM SAPPHIRE W/MIC WHELEN SA315P DTI 010Wx6 LED

WHELEN 600 LED WHELEN 600 LED WHELEN 500 LED WHELEN 600 LED

WHELEN M9V2R LED WHELEN M9V2 LED LUMA BAR H20-12* KUSSMAUL AUTO CHARGE PUMP PLUS

1200

DUO SAFETY 585-A DUO SAFETY 775-A DUO SAFETY 900-A

OF 1

J0218

COMPT.	COMPARTMENT FRAME DIMENSIONS
L1	36W x 65H x 13.5/26D
L2	36W x 40H x 13.5/26D
L3	36W x 40H x 13.5/26D
R1	36W x 65H x 13.5/26D
R2	36W x 40H x 13.5/26D
R3	36W x 40H x 13.5/26D

NOTES:

AUTHORIZATION OF FGFT.

THE DRAWING IS FOR REFERENCE PURPOSE, ONLY.

THE DRAWING MAY OR MAY NOT SHOW ALL ITEMS AS DESCRIBED IN THE WRITTEN DETAILED SPECIFICATION.

2. INCLUSION OF AN ITEM ON THE DRAWING DOES NOT CONSTITUTE INCLUSION OF THAT ITEM WITH THE FINAL DELIVERY OF THE UNIT. SPECIFICATION SHALL BE FINAL AUTHORITY TO BE DETERMINED WHAT IS SUPPLIED ON THE APPARATUS.

3. THE EFFECTIVE DOOR OPENING FOR ROLLUP DOORS WILL BE REDUCED APPROVINATELY AND IN MEDITAL 27 IN JUSTICE AND 27 IN MUSTLE FROM SHOWN

APPROXIMATELY 10" IN HEIGHT,2" IN DEPTH AND 2" IN WIDTH FROM SHOWN FRAME OPENINGS AND 2" IN HEIGHT,3" IN DEPTH AND UP TO 4" IN WIDTH

FOR PAN DOORS.
PUMP RATING AND TANK CAPACITY ARE SHOWN AS NOMINAL VALUES.

THE ACTUAL VALUES MAY VARY.

5. CHASSIS GWAR SHOWN IS THE MINIMUM REQUIRED FOR STANDARD BODY DEPENDING OF OPTIONS, GWAR MAY NEED TO BE INCREASED.

6. OEM CAB STEPS MAY NOT MEET ULC STANDARD.

SELECT CUSTOM STEPS WHEN REQUIRED

OVERALL HEIGHT IS IN LOADED CONDITION, UNLOADED HEIGHT MAY BE 4" ABOVE HEIGHT SHOWN. AFTER TRUCK IS COMPLETED ADDITIONAL STEPS MAY BE REQUIRED TO MEET THE STANDARD.

B. DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO CHANGE AS MAY BE FOUND NECESSARY DURING DESIGN. DO NOT SCALE DRAWING.

D. MINOR DETAILS AND REFLECTIVE STRIPING ARE NOT SHOWN.

DWG. NO. :

DESCRIPTION: MODEL: SP 19 NOV 2021 REVISED CUSTOMER SIGN OFF DWG SIR WILLIAM JOHNSON APTTS25H7 В CUSTOMER SIGN OFF DRAWING SP 21 SEP 2021 TRUCKS RΕ SCALE: DWG. BY: CHK. BY: DATE: CRM DRAWING Α WWW.FGFT.COM 1:60 TV 11 DEC 2020 WINNIPEG, MANITOBA, CANADA 1-800-565-3473 DESCRIPTION OF CHANGE REV BY DATE